




N



EAN code
ZSB3-40/W: 8595188192552
Order Code: 9255



EAN code
ZSB3-60/W: 8595188192576
Order Code: 9257



EAN code
ZSB3-90/W: 8595188192590
Order Code: 9259

Technical parameters	ZSB3-40	ZSB3-60	ZSB3-90
Inputs			
Temperature measuring:	YES, built-in temperature sensor		
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range		
Humidity measurement:	YES		
Humidity measurement range:	0 to 99 % RH		
Inputs:	AIN/DIN		
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2		
Type of external sensor:	TC/TZ		
Temperature measurement range:	-20 °C to +120 °C		
Temperature measurement accuracy:	0.5 °C from the range		
Illuminance sensor:	1 to 12 000 Lx		
Buttons			
Number of control buttons:	4	6	9
Type:	button		
Indication:	white illuminated button		
Outputs			
Acoustic output:	piezo-changer		
Communication			
Installation BUS:	BUS		
Power supply			
Supply voltage/tolerance:	27 V DC, -20/+10 %		
Dissipated power:	max. 0.5 W		
Rated current:	25-43 mA	25-50 mA	25-50 mA
	(at 27 V DC), from BUS		
Connection			
Terminals:	EIB \varnothing 0.6 - 0.8 mm ²		
Operating conditions			
Relative humidity:	max. 80 %		
Operating temperature:	-20 to +55 °C		
Storing temperature:	-30 to +70 °C		
Protection degree:	IP40		
Overvoltage category:	II.		
Pollution degree:	2		
Operation position:	any		
Installation:	on the wall, observing the conditions for correct installation of the sensor		
Dimensions and weight			
Dimensions:	94 x 94 x 40 mm		
Weight:	154 g		
Standards:	EN 63044-1		

- Glass switch buttons ZSB3-40/XX, ZSB3-60/XX and ZSB3-90/XX are part of a comprehensive range of iNELS control units and can be advantageously used in all projects.
- ZSB3 comes with premium glass plates in the white and black.
- ZSB3-40/XX is equipped with four, ZSB3-60/XX six and ZSB3-90/XX nine touch buttons whose functions can easily modify by the software.
- The glass switch button are equipped with an integrated temperature sensor. It is also equipped with analog-to-digital input (AIN/DIN), which can be used to connect potential-free contact or external temperature sensor TC/TZ (for example temperature measurement of the floor).
- Advantages over conventional switches/buttons are saving space, signalling the state of any system output, the ability to measure temperature as well as the ability to connect external buttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign each button a different function or macro (set of functions). It is therefore possible to use one button to control several appliances at once.
- Glass switch button is a design component of the iNELS system and is available in white and black.
- There is an option upon request to engrave text for each button, further enhancing customization possibilities.
- Individual buttons can be illuminated in white.
- ZSB3-40/XX, ZSB3-60/XX and ZSB3-90/XX are designed for mounting into an installation box.
- All versions are in the size of the standard module (94x94 mm).

Another view



ZSB3-90/B

N



EAN code
ZSB3-40/B: 8595188192545
Order Code: 9254




EAN code
ZSB3-60/B: 8595188192569
Order Code: 9256




EAN code
ZSB3-90/B: 8595188192583
Order Code: 8908


ZSB3-90/xx

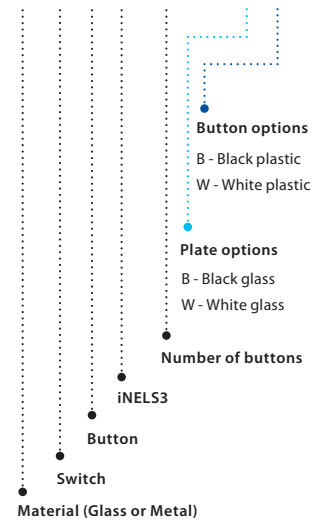

Connection

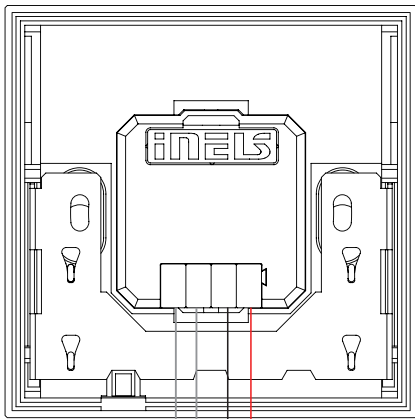

1x input for free potential contacts
(button, motion sensor, etc.)

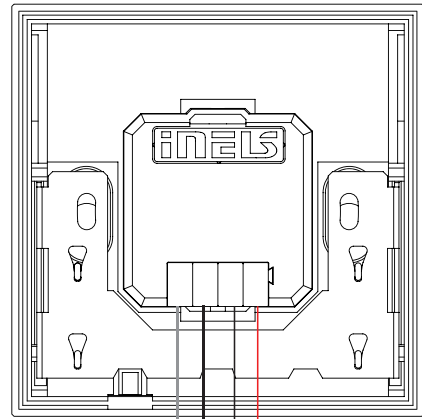

temperature sensor TC/TZ

